1	2	3	4	5	6	7	8	
DRAWING NUMBER/SHEET NUMBER F1852	REMOVE ALL BURRS & SHARP EDGES			IF IN DOUBT ASK!		3RD ANGLE PROJECTION		A
								B
								C
								D
								E
								F

NOTES

i) IP 66/67 RATING

ii) SUITABLE FOR 3 CORE 6mm SQ. INCOMING CABLE AS STANDARD.

iii) THRO' WIRING IS STANDARD ON ALL MODELS.

iv) THERE ARE TWO M8 THREADED STAINLESS BUSHES INSERTED INTO STAINLESS STEEL BODY FOR MOUNTING TO CEILING.(SEE DIMENSION 'B')

v) BI-PIN LAMPHOLDERS ARE STANDARD.

vi) EC Type Examination Certificate Baseefa04ATEX0220

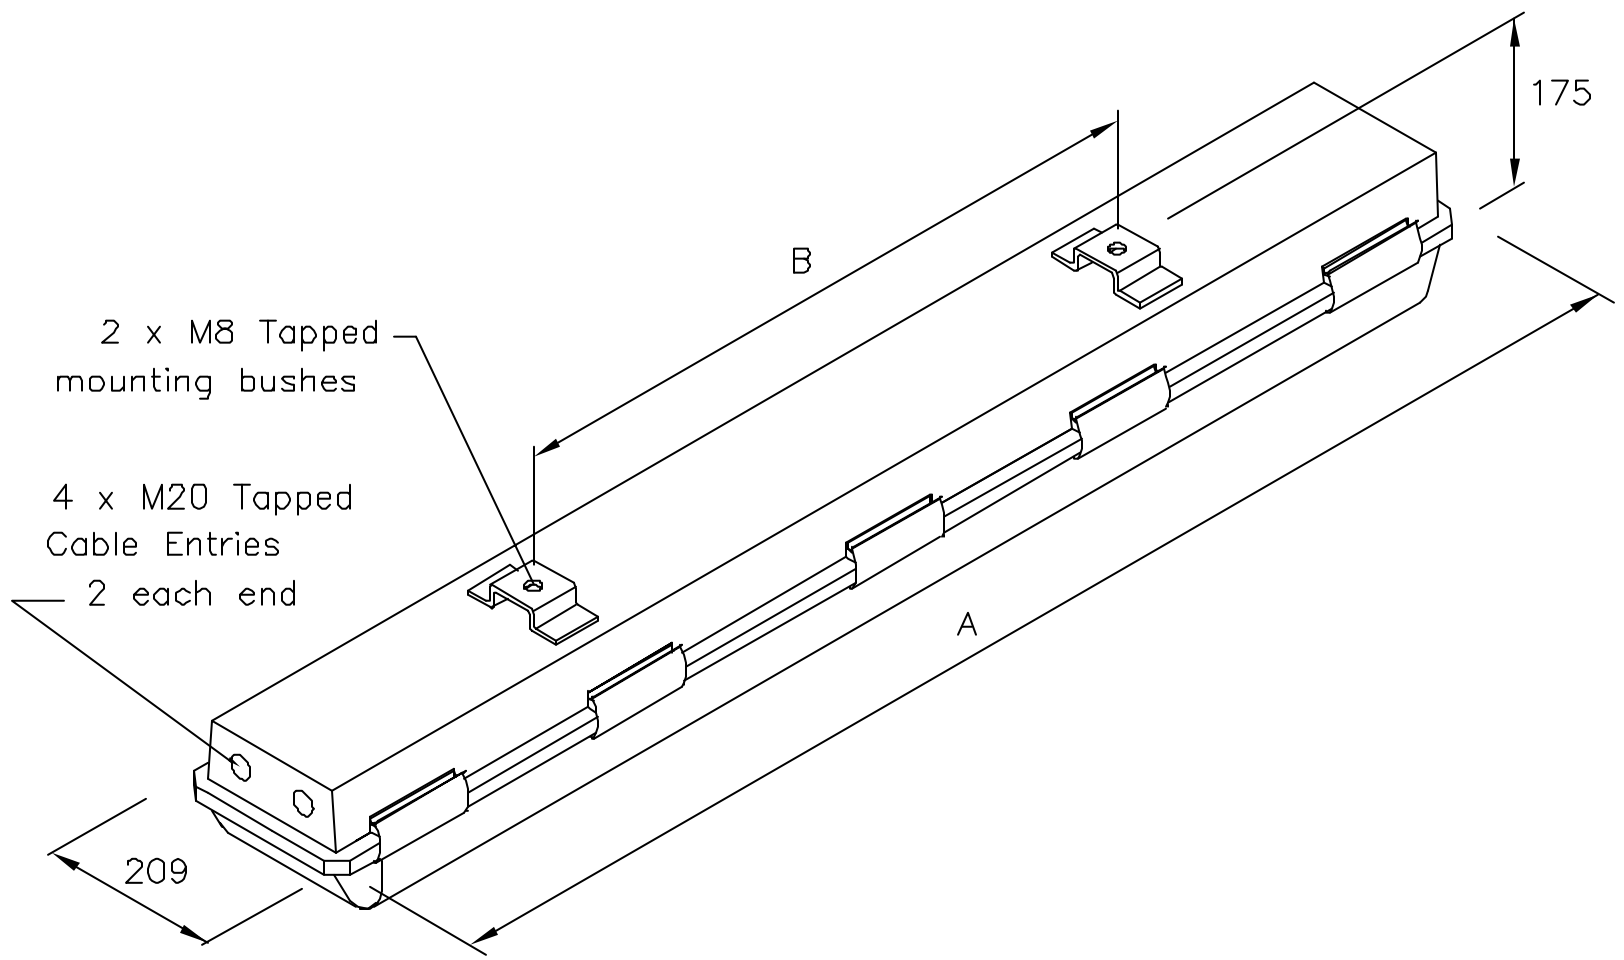

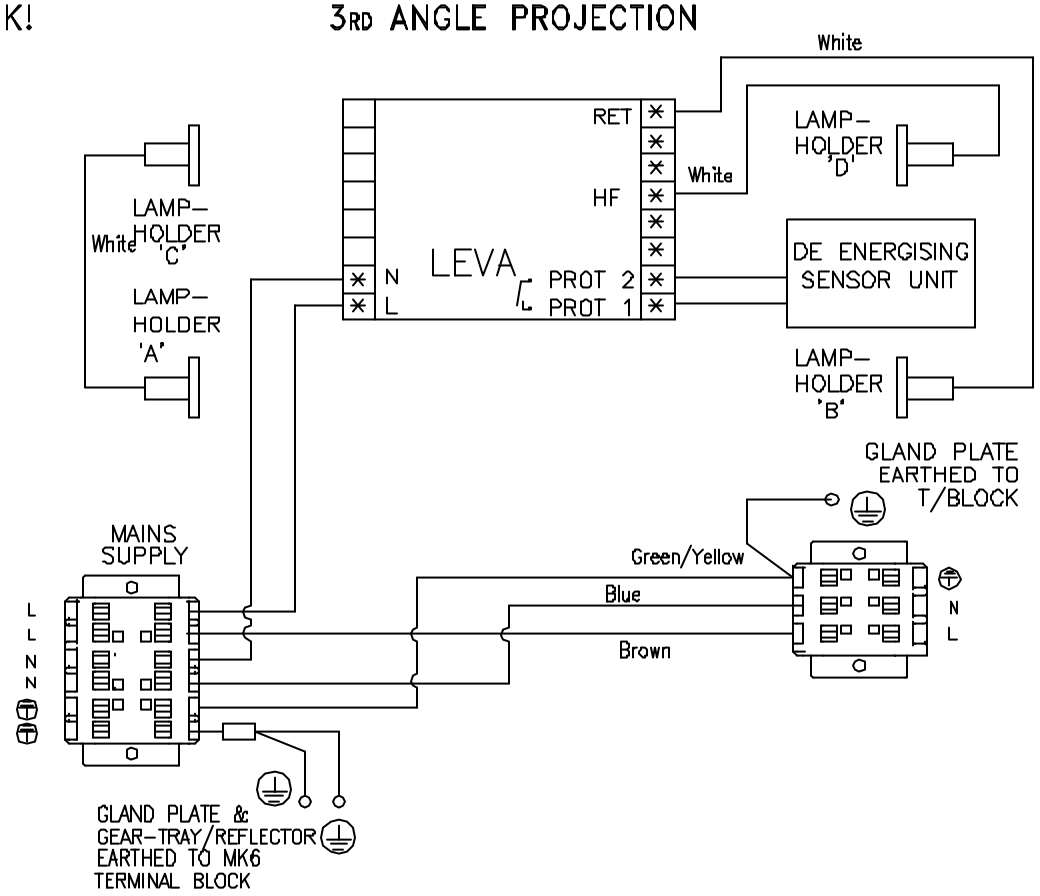

MODEL	'A'	'B'	CODING
2x18/20W	742	400	II 2 G D EEx eqm II T4 AMB. -20°C to 55°C, T95°C
2x36/40W	1352	700	II 2 G D EEx eqm II T4 AMB. -20°C to 55°C, T95°C

DCF No	MOD BY	CHANGE	ISSUE	DATE
				01.03.04

Chalmit Lighting

Chalmit Lighting
388 Hillington Road,
Glasgow G52 4BL
Scotland
Tel:0141 882 5555 Fax:0141 883 3704

DRAWN	jcampbell
CHECKED	kbowie
APPROVED	jcampbell
DATE	

REF. DRGS.-

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES.
AUTHORISATION IS GIVEN TO ..... TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

MATERIAL	ST ST & POLYCARBONATE
TOLERANCE	
FINISH	SELF
SURFACE ROUGHNESS	
DIMS. IN	MM
SCALE	-

TITLE: PRO ST.ST. 2x18/36W LEVA WITH WIRING DIAGRAM Baseefa04ATEX0220

DRAWING NUMBER/SHEET NUMBER: F1852 01 OF 01